
## **SECURE UNDERSEAT STORAGE**

Fits Ford F150 2015-2020 **OPS-US-FORD-F150** 

## **STANDARDS:**

- 8"H x 54"W x 13"D
- 16 gauge steel construction
- Black powder coat
- Paddle latch per lid
- Convoluted foam inside



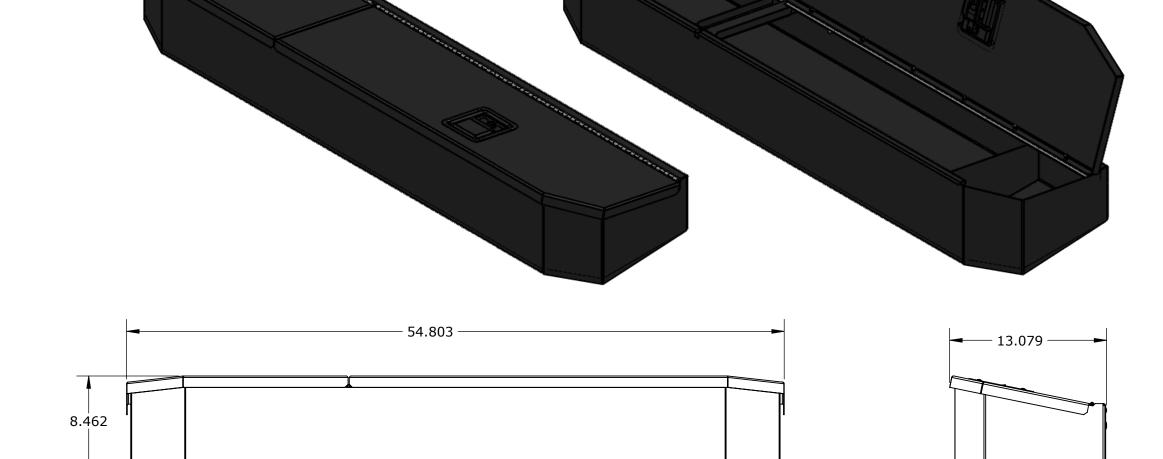

DISCLAIMER: By signing and dating this document, I agree that all specifications, notes and dimensions are clear, correct and in accordance with intended product use, content fit and function and product envelope fit and function. I understand this agreement to be binding and accept that any future change requests will be charged as additional work and managed through revision of this document. All custom orders cannot be cancelled and merchandise cannot be returned. If an order is cancelled by the purchaser after the order has been released to production, EZ STAK reserves the right to charge an order cancellation fee of 40% in addition to the normal restocking fee of 20%.

Signature:



	S/	JBLIC FETY ace Systems 3419 .5489
DESCR SECURE STORAC SUPER C	UNDER GE-FOR	SEAT
PART I OPS-U	NO. IS-FORI	D-F150
	NAME	DATE
DRAWN	AD	7/17/2020
CHECKED	KO	07/17/2020
MATERIAL: THICKNESS: FINISH WEIGHT:		N N COATED BLA 47.629
MATERIAL: THICKNESS: FINISH WEIGHT: TOLERAN SPECEFIEL X. X.XX X.XX X/ X	POWDER	N COATED BLA 47.629 S OTHERWISE
MATERIAL: THICKNESS: FINISH WEIGHT: TOLERAN SPECEFIEI X. X.XX X.XX X/ X DO NOT	POWDER CES UNILES 2: X ±0.02 X ±0.02 X ±0.02 X ±0.02 X ±0.02 X ±1/32 C ±1	N COATED BLA 47.629 S OTHERWISE
MATERIAL: THICKNESS: FINISH WEIGHT: TOLERAN SPECEFIEI X. X.XX X.XX X.XX X.XX X.XX THE INFORM DRAWING IS EZSTAK LLC / PART OR AS	POWDER CES UNLES CES UNLES CES UNLES X ±0.02 X ±0.00 X ±1/32 C ±1 C SCALE D F SCALE D RY AND CC ATION CON THE SOLE PI ANY REPROI A WHOLE W	N COATED BLA 47.629 S OTHERWISE 5 0 5 2 ° RAWING NFIDENTIAL TAINED IN THIS ROPERTY OF DUCTION IN
MATERIAL: THICKNESS: FINISH WEIGHT: TOLERAN SPECEFIEL X. X.XX X.XX X.XX X.XX DO NOT PROPRIETA THE INFORM/ DRAWING IS EZSTAK LLC / PART OR AS, WRITTEN PER	POWDER CES UNILES 2: X ±0.02 X ±0.01 X ±0.00 (X ±1/32 (* ±1) F SCALE D RY AND CON THE SOLE PI ANY REPROI A WHOLE W WISSION OF	N COATED BLA 47.629 S OTHERWISE 5 0 5 2 RAWING NFIDENTIAL TAINED IN THIS ROPERTY OF DUCTION IN THOUT THE

Date: